

TOSHIBA

Satellite® P10

Feature Model(s):

Satellite P10-S429

P4 2660/15.4" Wide XGA/512MB/60GB/DVD-CDRW/Mdm/LAN/Wi-Fi/WinXP Pro

Satellite P10-S4291

P4 2660/15.4" Wide XGA/512MB/60GB/DVD-CDRW/Mdm/LAN/Wi-Fi/WinXP Home

Small Business Series

P4 2660/15.4" Wide XGA/512MB/60GB/DVD-CDRW/Mdm/LAN/Wi-Fi/WinXP Pro/Office XP Small Business

P4 2660/15.4" Wide XGA/512MB/60GB/DVD-CDRW/Mdm/LAN/Wi-Fi/WinXP Pro/Office XP Professional

Part Numbers

PSP10U-10U6V7

PSP10U-10U6V3

PSP10U-10U6V7W

PSP10U-10U6V7X

Product Highlights

Performance

- Intel® Pentium® 4 processor 2.66GHz
- 512MB of Main Memory
- 60GB* hard disk drive

Great Features

- 15.4" Wide XGA active matrix display
- **NVIDIA® GeForce™ FX Go5100**, 32MB DDR video memory
- DVD-CDRW Multi-function drive

Get On-Line

- Integrated V.92/56K modem
- Integrated 10/100 Ethernet LAN
- Integrated **802.11g** Wireless LAN

System Characteristics

CPU (See CPU Performance Disclaimer)**

- Intel® Pentium® 4 processor at 2.66GHz **

L2 Cache

- 512KB Level 2 Cache integrated on die
- 566MHz Processor System Bus Clock Speed (PSB)

Memory

- 512MB DDR SDRAM (**Expandable to 2048MB**) (Both slots may be occupied)
- Expansion memory: 128/256/512/1024MB, 2.5V, SODIMM, PC2100 DDR SDRAM
- Data/Address Bus Width: 64-bit/32-bit
- Intel® 865PE + ICH5 Chipset

Mass Storage/Optical Drive

- **Primary Hard Disk Drive:** 60GB* hard disk drive, 5400rpm, Enhanced IDE (ATA-5) Interface, 9.5mm height, 0.2lbs., Service removable
- **Main Module Bay – DVD/CD-RW Multi-function drive:** ATAPI Interface; Maximum speed (READ): CD-R(24x), CD-RW(12x), CD-ROM(24x), DVD-ROM(8x), DVD-R(4x), DVD-RW(4x), DVD-RAM(1x); Maximum speed (WRITE): CD-R(24x), CD-RW(4x) *Compatibility:* CD-ROM, CD-R (read/write), CD-RW (read/re-write), DVD-ROM, DVD-R (read), DVD-RW (read), DVD-RAM (read); 12.7mm height, user removable
- Software Decoder: InterVideo® (WinDVD™)

Graphics/Video

- **15.4"** Wide XGA (diagonal) TFT active-matrix display****; internal display supports up to 16M colors at 1280 x 800
- **NVIDIA® GeForce™ FX Go5100** graphics controller; 32MB DDR external video memory
- Direct X 9.0 support, OpenGL support
- External Color Support/Refresh Rate: (Depending on CRT)
800 x 600; 60/70/72/75/85/100/120Hz
1024 x 768; 60/70/72/75/85/100/120Hz
1280 x 800; 57/60/70/72/75/85/100/120Hz
1280 x 1024; 60/70/72/75/85/100/120Hz
1440 x 900; 60/70/72/75/85/100Hz
1600 x 1200; 60/70/72/75/85/100Hz
1680 x 1050; 60/70/72/75/85/100Hz
1920 x 1200; 60Hz
1920 x 1440; 60Hz
2048 x 1536; 60Hz

Input Devices

- **Keyboard:** Full sized 85 keys with 12 function keys, 2.7mm key stroke, 6mm height; Dedicated Windows® & Application keys support; HotKey function; **TouchPad** pointing device

- **CD Control Function:** Play/Pause, Stop/Eject, Previous, Skip/Next, Mode Control switch (CD/DVD/Digital Audio)
- Toshiba Console button & Instant Access Internet button
- One Touch TV-out button

Expandability

- 2 memory slots (Both slots may be occupied)
- 1 PC Card slot supports 1 Type II

Communications

• Integrated V.92/56K modem; Data and fax support
Due to FCC limitations, speeds of 53kbps are the maximum permissible transmission rates during Download. Actual data transmission speeds will vary depending on line conditions.

- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN – (Atheros)

Ports

- RGB (monitor) port
- Parallel port
- 3 Universal Serial Bus ports (**USB 2.0**)
- TV-Out (S-Video)
- RJ-45 LAN port
- RJ-11 modem port
- i.Link (IEEE 1394) port
- Secure Digital® (SD) card slot

Physical Description

- Dimensions (LxWxH): 14.2: x 10.8" x 1.7"
- Weight: 7.99lbs

LED Indicators: Power, HDD, DVD/CDRW, DC-IN, Caps Lock, Arrow, Numeric, Main Battery Charging Status, System Sleep/Suspend Status, SD Card, Wireless Communication (left side)

Sound

- Realtek ALC202 Codec Chip, Software Sound
- 16-bit stereo, Windows Sound System Ver. 2.0; SoundBlaster® Pro compatible (in DOS box only)
- Built-in stereo speakers
- Direct 3D Sound (supported by sound driver); Hardware acceleration for DirectSound and DirectMusic; Full Duplex and MIDI (play back) support
- Sound Volume (by Dial)
- **Ports:** External Microphone port, headphone port (stereo), Line-in port

Power Supply

- **AC Adapter:** 120W AC Adapter, 100-240V / 50-60Hz frequency (Universal) input voltage, 19V x 6.3A Output.
Dimensions (LxWxH): 5.9" x 2.5" x 1.5"
Weight: 1.38lbs
- **Battery Pack:** 12-cell, rechargeable, removable Lithium Ion (Graphite) battery; 14.8V x 6450mAh
Dimension (LxWxH): 4.9" x 5.3" x 0.9"
Weight: 1.3lbs
- Battery Saver (in WindowsXP): Stand by, HDD Auto Off, Display Auto Off, Hibernation
- **Battery Life:** 2.0H ***
Recharge Time (Off/On): Main Battery– Up to 4Hrs/ Up to 12Hrs

Battery life may vary depending on applications, power management settings and features utilized. Recharge time varies depending on usage. Battery may not charge while computer is consuming full power. After a period of time, the battery will lose its ability to perform at maximum capacity and will need to be replaced. This is normal for all batteries. To purchase a new battery pack or see information on accessories shipping with your computer, visit the Toshiba website at www.accessories.toshiba.com.

TOSHIBA

Security

- Slot for computer lock, memory (2 screws), Built-in Modem (2 screws), Wireless LAN module (2 screws), Main Module Bay (by 2 screws), Main Battery (by sliding latch), User Power-on password, Setup Security, Screen Blank (by Hotkey), Screen Saver (by software)

Bios

- ACPI, PnP, VESA, DPMS, DDC, SM BIOS, PCI BIOS support

Operating System

- **Microsoft® Windows XP Pro** pre-installed (**P10-S429**)
- **Microsoft® Windows XP Home** pre-installed (**P10-S4291**)
- Microsoft® Windows 2000 component drivers on the web

Additional Software

- **Microsoft® Office XP Professional** (See Product/Part Numbers below)
- **Microsoft® Office XP Small Business** (See Product/Part Numbers below)
- Drag'n Drop CD+DVD Software
- Toshiba Notebook Maximizer
- Intuit® Quicken® New User's Edition 2003
- Norton® AntiVirus™ 2003 w/3 Month Subscription
- AOL® (3-month offer)

AOL OFFER DETAILS: Availability may be limited, especially during peak times. TO AVOID BEING CHARGED A MONTHLY MEMBERSHIP FEE, SIMPLY CANCEL BEFORE THE THREE-MONTH PROMOTIONAL PERIOD ENDS. Premium services carry surcharges and communication surcharges may apply, including AK, even during promotional period. Members may incur telephone charges on their phone bill, depending on their location and calling plan, even during promotional period. Available to new AOL members in the United States, age 18 or older; a major credit card or checking account is required.

- Adobe® Acrobat Reader
- AT&T® Worldnet® Service – 1 Month Free

Telephone access and other charges and other terms and conditions may apply. Offer available to new customers only. Offer expires 4/30/04.

- Microsoft Internet Explorer
- Toshiba ConfigFree™ Software
- Toshiba Custom Utilities
- Satellite Series Online Documentation
- **Toshiba Great Software Offer:** Receive your choice of two software titles. The software selection includes titles from the following categories: productivity, education/reference, creativity and entertainment

Warranty

- 1 year parts, labor and battery

Environmental Specifications

- **Temperature:** Operating: 5° to 35°C (41° to 95°F); Non-operating: -20° to 65°C (-4° to 149°F)
- **Thermal gradient:** Operating: 15°C per hour maximum; Non-operating: 20°C per hour maximum
- **Relative Humidity:** Operating: 20% to 80% non-condensing; Non-operating: 10% to 95% non-condensing
- **Altitude (relative to sea level):** Operating: -60 to 3000 meters; Non-operating: -60 to 10,000 meters
- **Shock:** Operating: 10G; Non-operating: 60G
- **Vibration:** Operating: 0.5G; Non-operating: 1.0G

SelectServ® Warranty Programs

SWP-PEQQ3V	Warranty Extension to 3 Years
SWP-PEGQ3V	3 Year SystemGuard
SWP-PEQX3V	3 Year Depot Express
SWP-PEGX3V	3 Year SystemGuard + Depot Express
SWP-PEQN3V	3 Year Business On-Site Repair; Next Day Business Day Response
SWP-PEGN3V	3 Year SystemGuard + Business On Site Repair, Next Business Day Response

Product/Part Numbers

Satellite P10-S429	PSP10U-10U6V7
Satellite P10-S4291	PSP10U-10U6V3
Satellite P10 Small Business Series – Small Business:	PSP10U-10U6V7W
Satellite P10 Small Business Series - Professional:	PSP10U-10U6V7X

Selected Toshiba Accessories

PA3290U-1ACA	Global AC Adapter (120W)
PA3307U-1BRS	Primary Battery Pack (12 Cell)
PA3109U-1FDD	USB Floppy Disk Drive
PA3271U-1BTM	Toshiba Bluetooth SD Card
PA3212U-3MPCR	Toshiba Wireless LAN Mini-PCI (Dealer Install)

SD (Secure Digital) Memory

SD-M3203B3	32MB SD Card
SD-M6403B3	64MB SD Card
SD-M1283B3	128MB SD Card
SD-M2564B3	256MB SD Card

Kingston Memory

KTT3311/128	128MB DDR SDRAM Memory
KTT3311/256	256MB DDR SDRAM Memory
KTT3311/512	512MB DDR SDRAM Memory

Cases

PA1326U-1NCS	Toshiba Blue Backpack
PA1328U-1NCS	Toshiba Executive Leather
PA1333U-1NCS	Toshiba Executive Nylon
NWCGV1	Targus Ambassador Case

* Go to www.accessories.toshiba.com for additional, available accessories

* GB = 1 Billion Bytes

** Central Processing Unit ("CPU") Performance Disclaimer:

CPU performance in your computer product may vary from specifications under the following conditions:

- use of certain external peripheral products
- use of battery power instead of AC power
- use of certain multimedia games or videos with special effects
- use of standard telephone lines or low speed network connections
- use of complex modeling software, such as high end computer aided design applications
- use of computer in areas with low air pressure (high altitude >1,000 meters or >3,280 feet above sea level)
- use of computer at temperatures outside the range of 5°C to 35°C (41°F to 95°F) or >25°C (77°F) at high altitude (all temperature references are approximate).

CPU performance may also vary from specifications due to design configuration.

Under some conditions, your computer product may automatically shut-down. This is a normal protective feature designed to reduce the risk of lost data or damage to the product when used outside recommended conditions. To avoid risk of lost data, always make back-up copies of data by periodically storing it on an external storage medium. For optimum performance, use your computer product only under recommended conditions. Read additional restrictions under "Environmental Conditions" in your product Resource Guide. Contact Toshiba Technical Service and Support for more information.

**** **TFT Display Disclaimer:** Small bright dots may appear on your TFT display when you turn on your PC. Your display contains an extremely large number of thin-film transistors (TFT) and is manufactured using high-precision technology. Any small bright dots that may appear on your display are an intrinsic characteristic of the TFT manufacturing technology.

Return Policy

TAIS does not accept the return of component parts, or bundled software, which have been removed from the PC system. Pro-rata refunds on individual PC components or bundled software, including the operating system, will not be granted. If you wish to return a complete PC system, contact the TAIS dealer where you purchased the product, and comply with the dealer's standard return policies and procedures.

Subject to Change

Accessories

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P10-S429.doc Created on 9/22/2003 2:01 PM Rev. 1.1 Page 2 of 3

TOSHIBA

While Toshiba has made very effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice. For the most up-to-date product information about your computer, or to stay current with the various computer software or hardware options, visit Toshiba's Web site at pcsupport.toshiba.com

*** Business Winstone® 2002 BatteryMark™ Version 1.0

These models achieved the battery life times shown using Ziff Davis Media Inc.'s Business Winstone® 2002 BatteryMark™ Version 1.0. These tests were performed without independent verification by the VeriTest testing division of Lionbridge Technologies, Inc. ("VeriTest"). Neither Ziff Davis Media Inc. nor VeriTest makes any representations or warranties as to the results of the tests. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. All products used in the tests were shipping versions available to the general public. The battery life results were achieved running the Business Winstone® 2002 BatteryMark™ Version 1.0 on the following system parameters. System parameters were set according to Ziff Davis Media Inc.'s recommendations.

Battery Life	Catalog Spec (1st)	2.0H
	(1st+2nd)	-
	Number of Conditioning Phase	1
	Life Test Run	2

CPU Name	Intel® Pentium®4 Processor	
Processor info	speed	2.8GHz
	number of processors	1
amount of RAM	512MB	
Amount of secondary RAM cache	512KB	


Battery	type(1st)	Li-Ion
		14.8Vx6450mAh(12cell)
	model number(1st)	PA3307U-1BAS/1BRS
	type(2nd)	-
		-
	model number(2nd)	-
	number of batteries	1st=1 , 2nd=0

Graphics	nVIDIA NV33M
amount and type of RAM	32MB
	DDR
graphics driver name and version	nVIDIA Display Driver for NV33M
graphics resolution and color depth, refresh rate	15.4"Wide 1280x800/32bit/60Hz


hard disk capacity	40GB (4200rpm)
hard disk file system & transfer mode+C15	Enhanced IDE(ATA-5)
hard disk controller model	Intel® 82801EBM
size of hardware cache if any	-

operating system version, service pack	Windows XP Professional Savice Pack 1
other special conditions	N/A


Front with display open

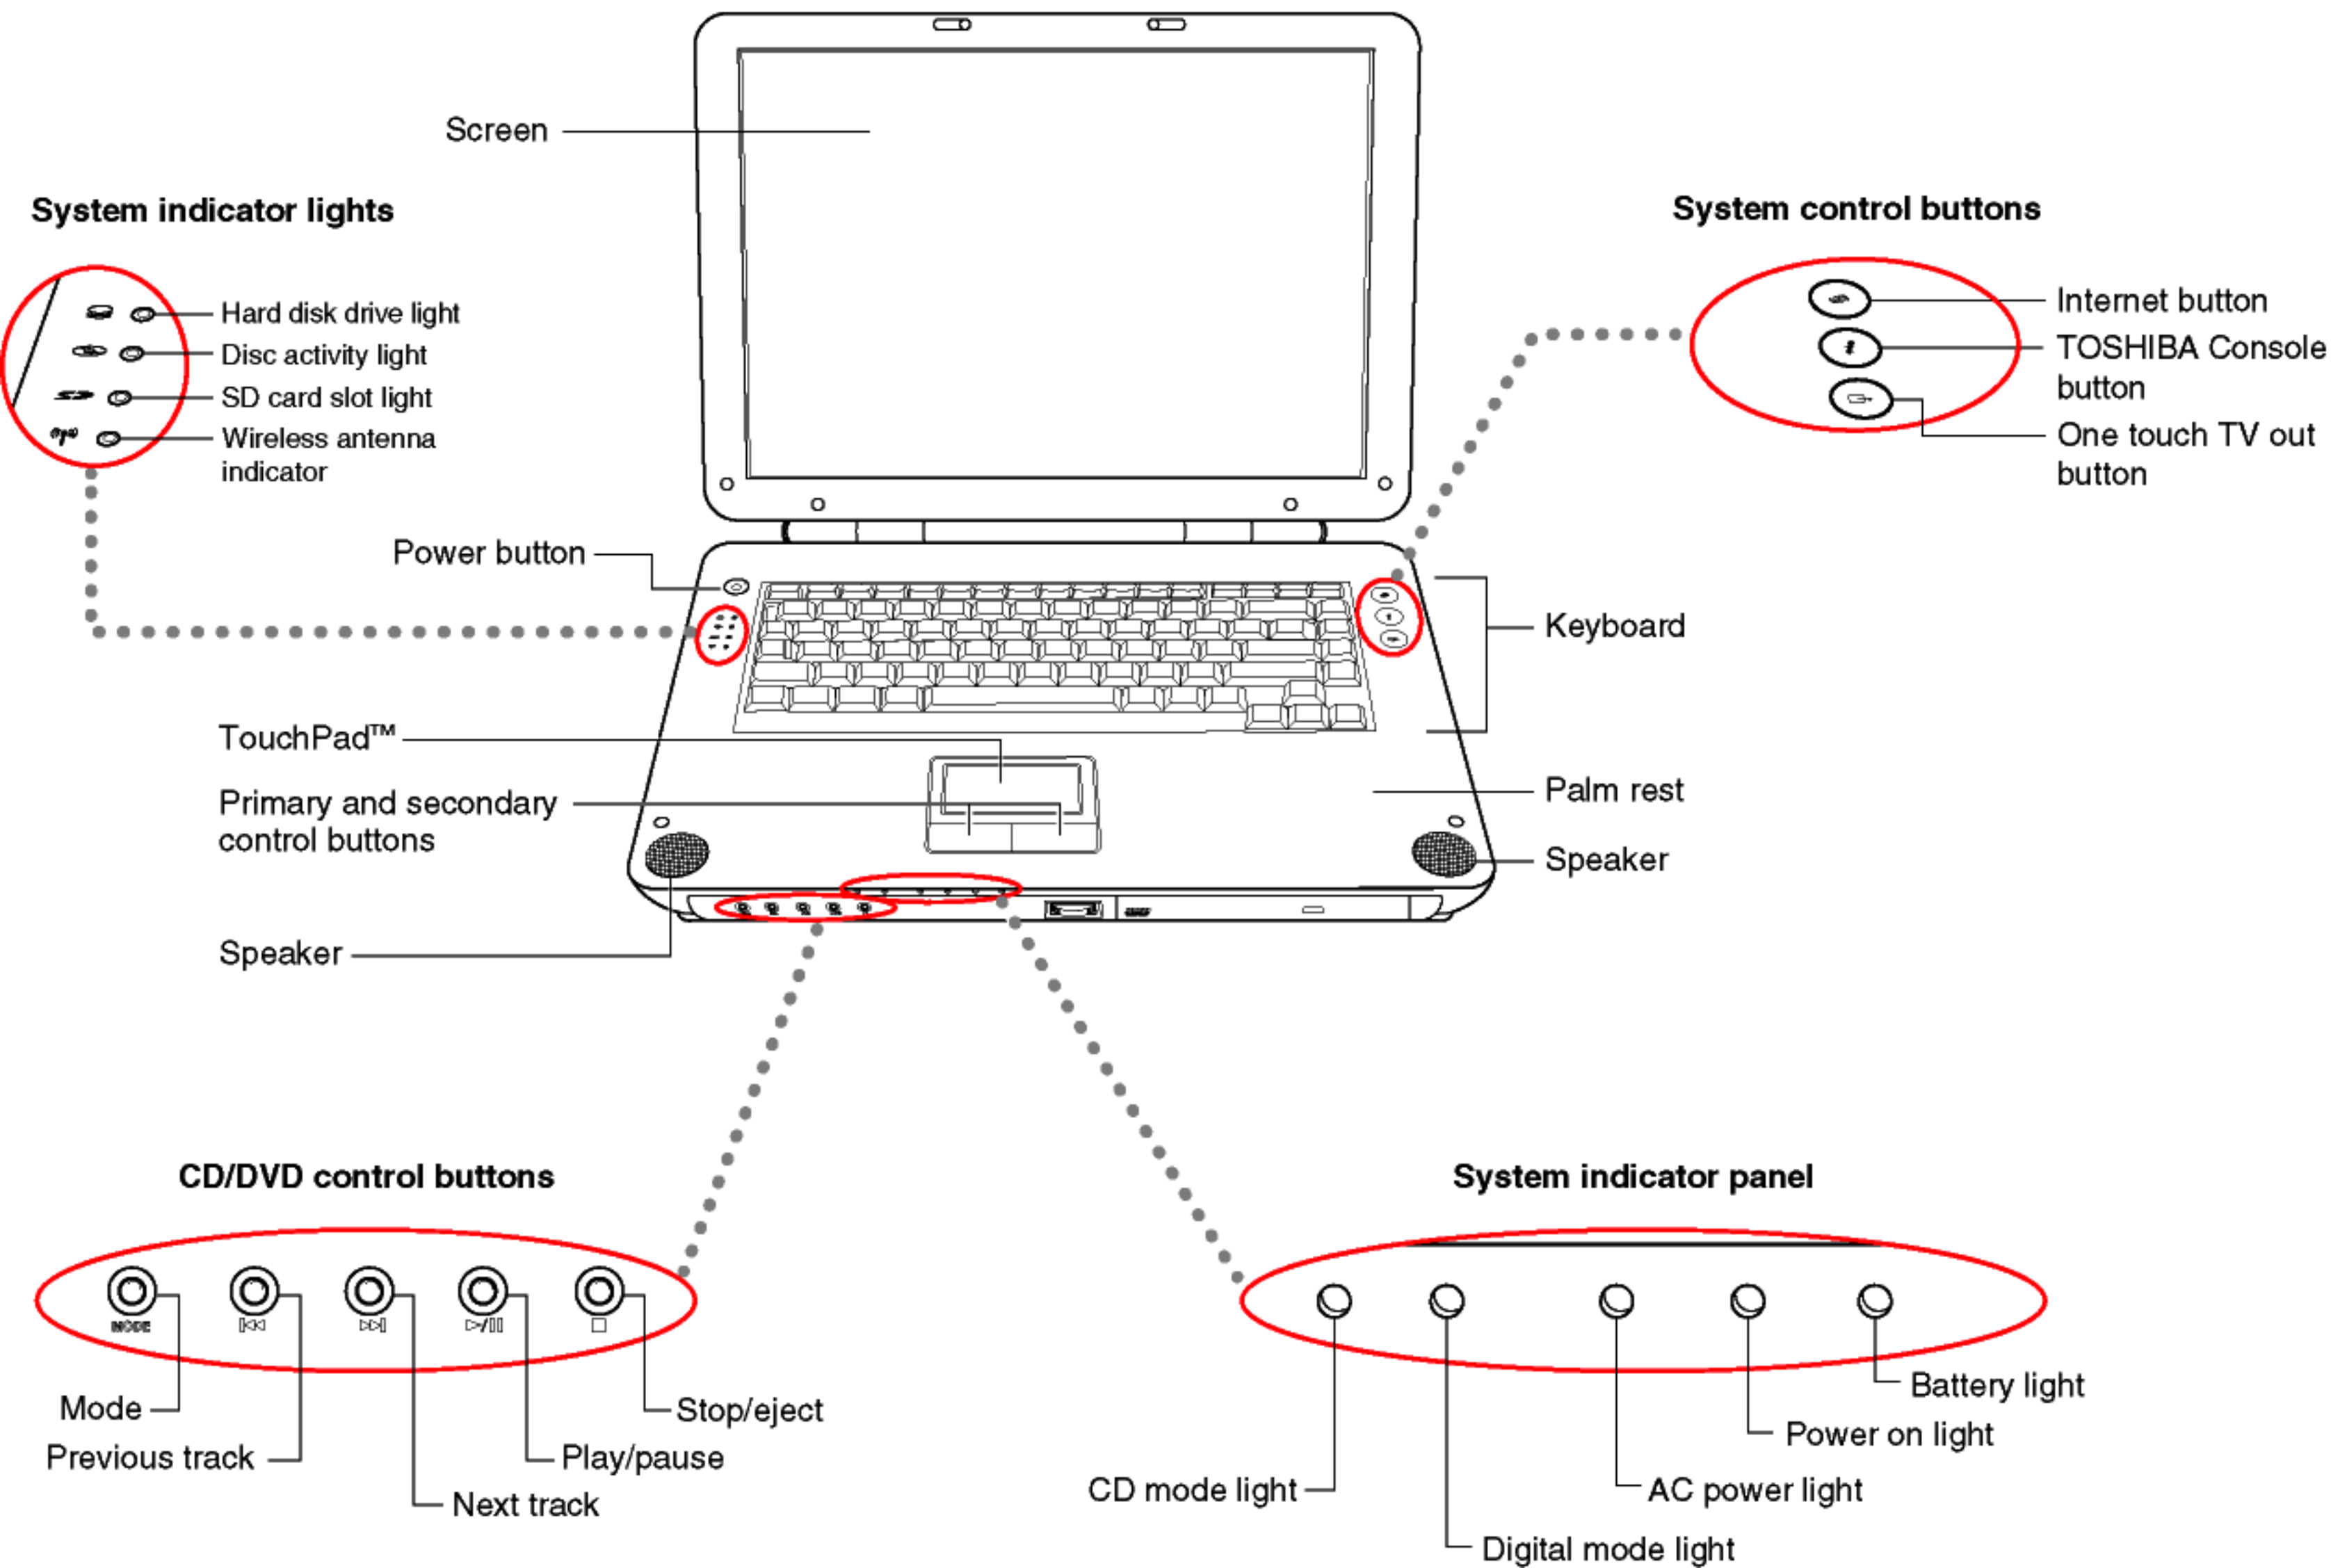


Front with display closed

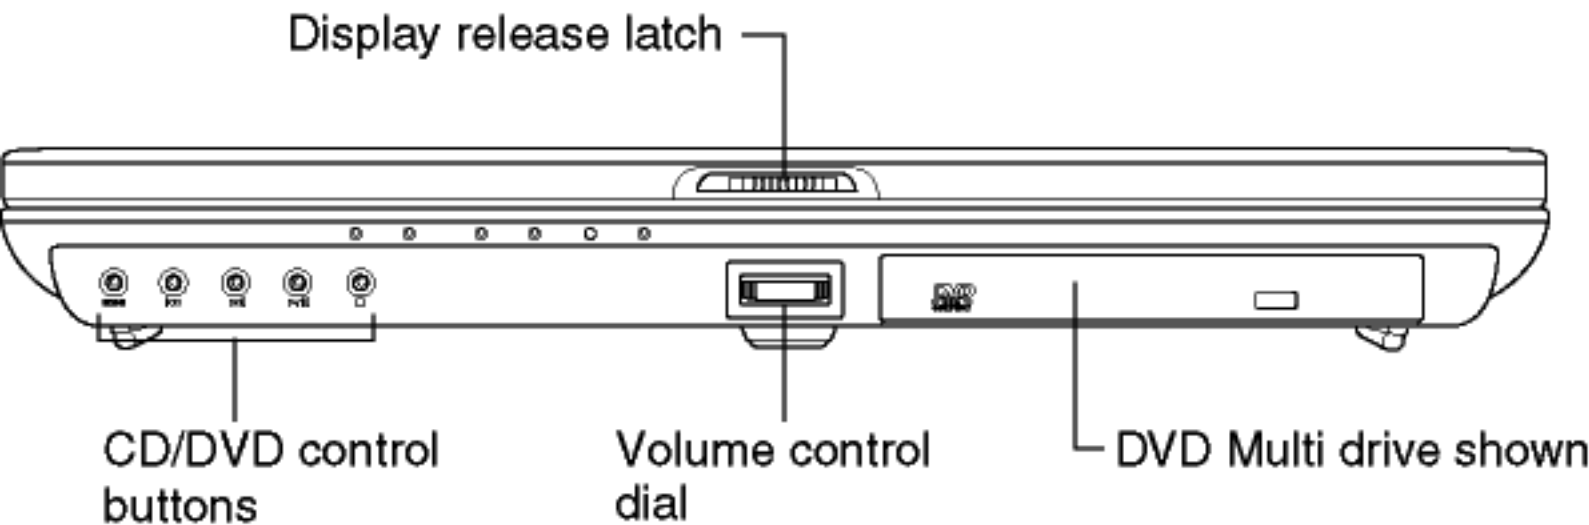

Right side

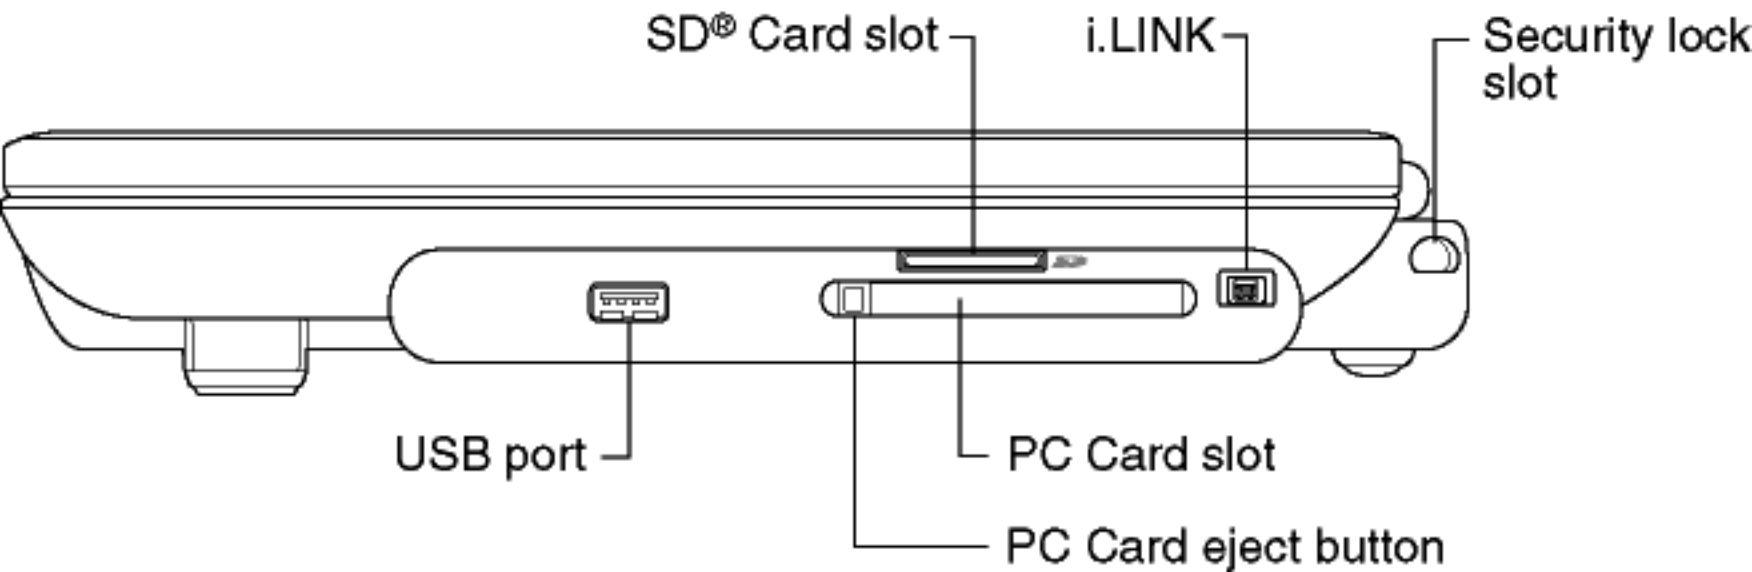


Left side

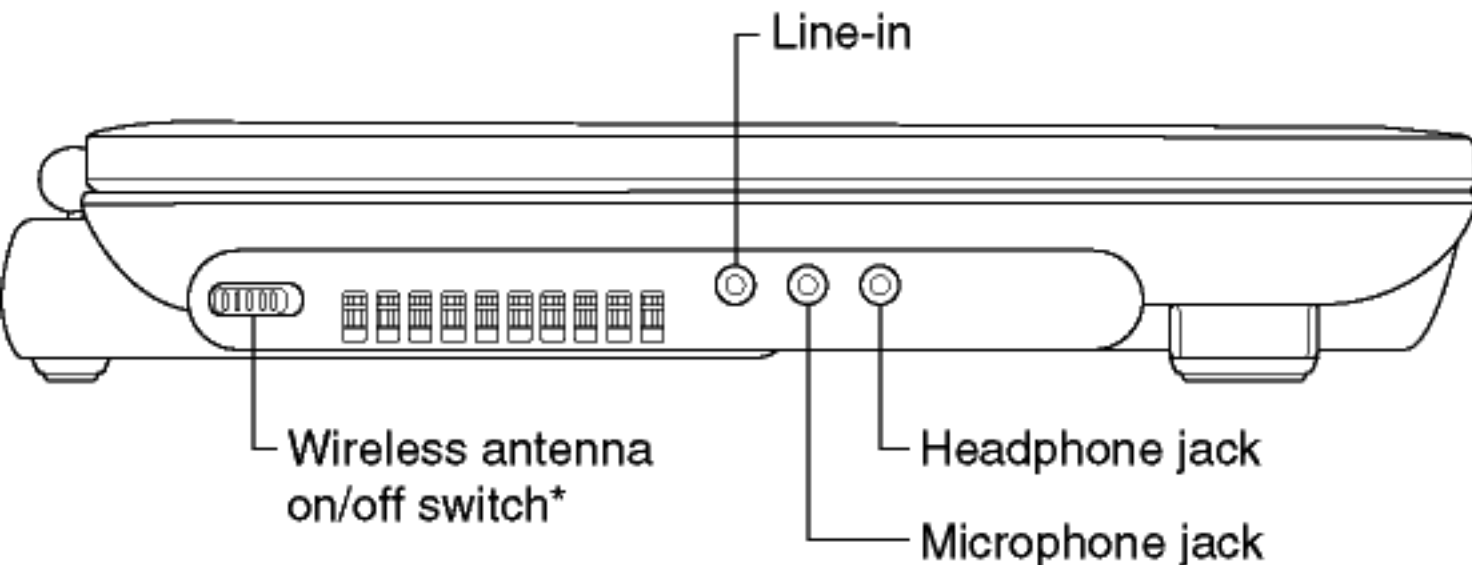


*Functional only on systems with wireless module installed.

Back

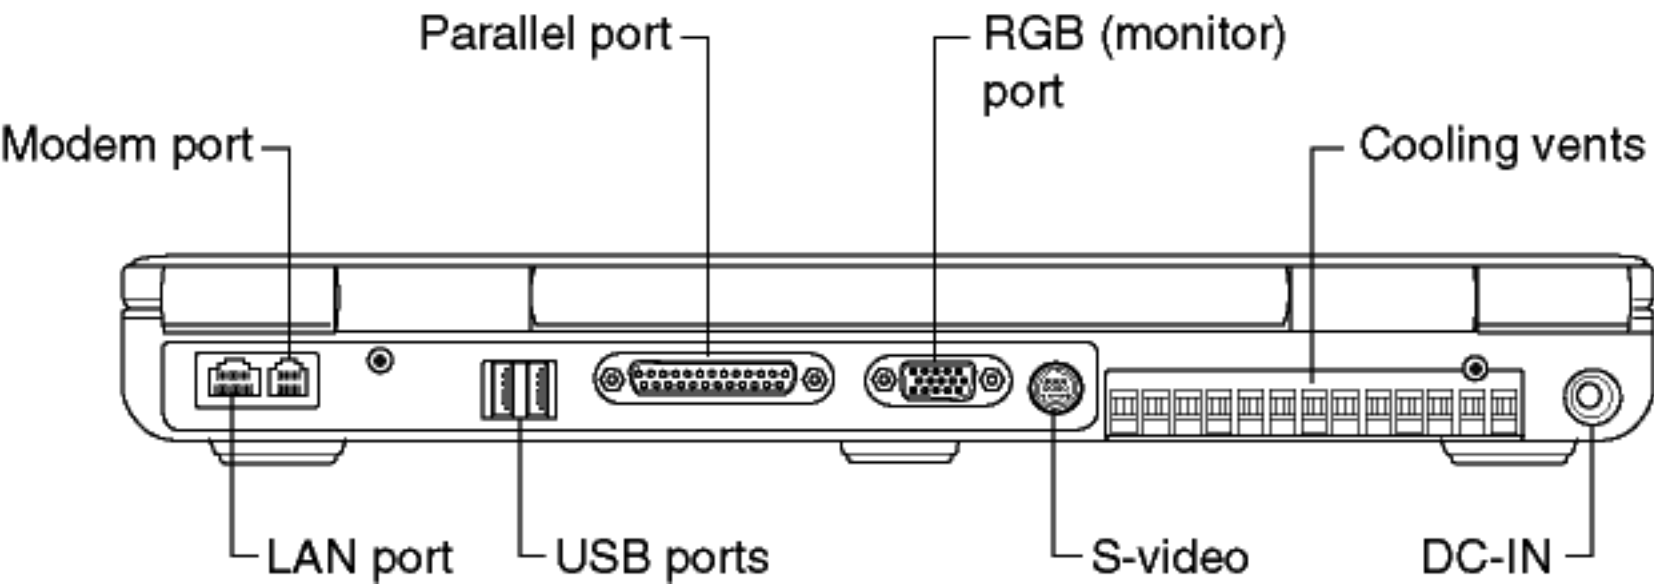

Underside

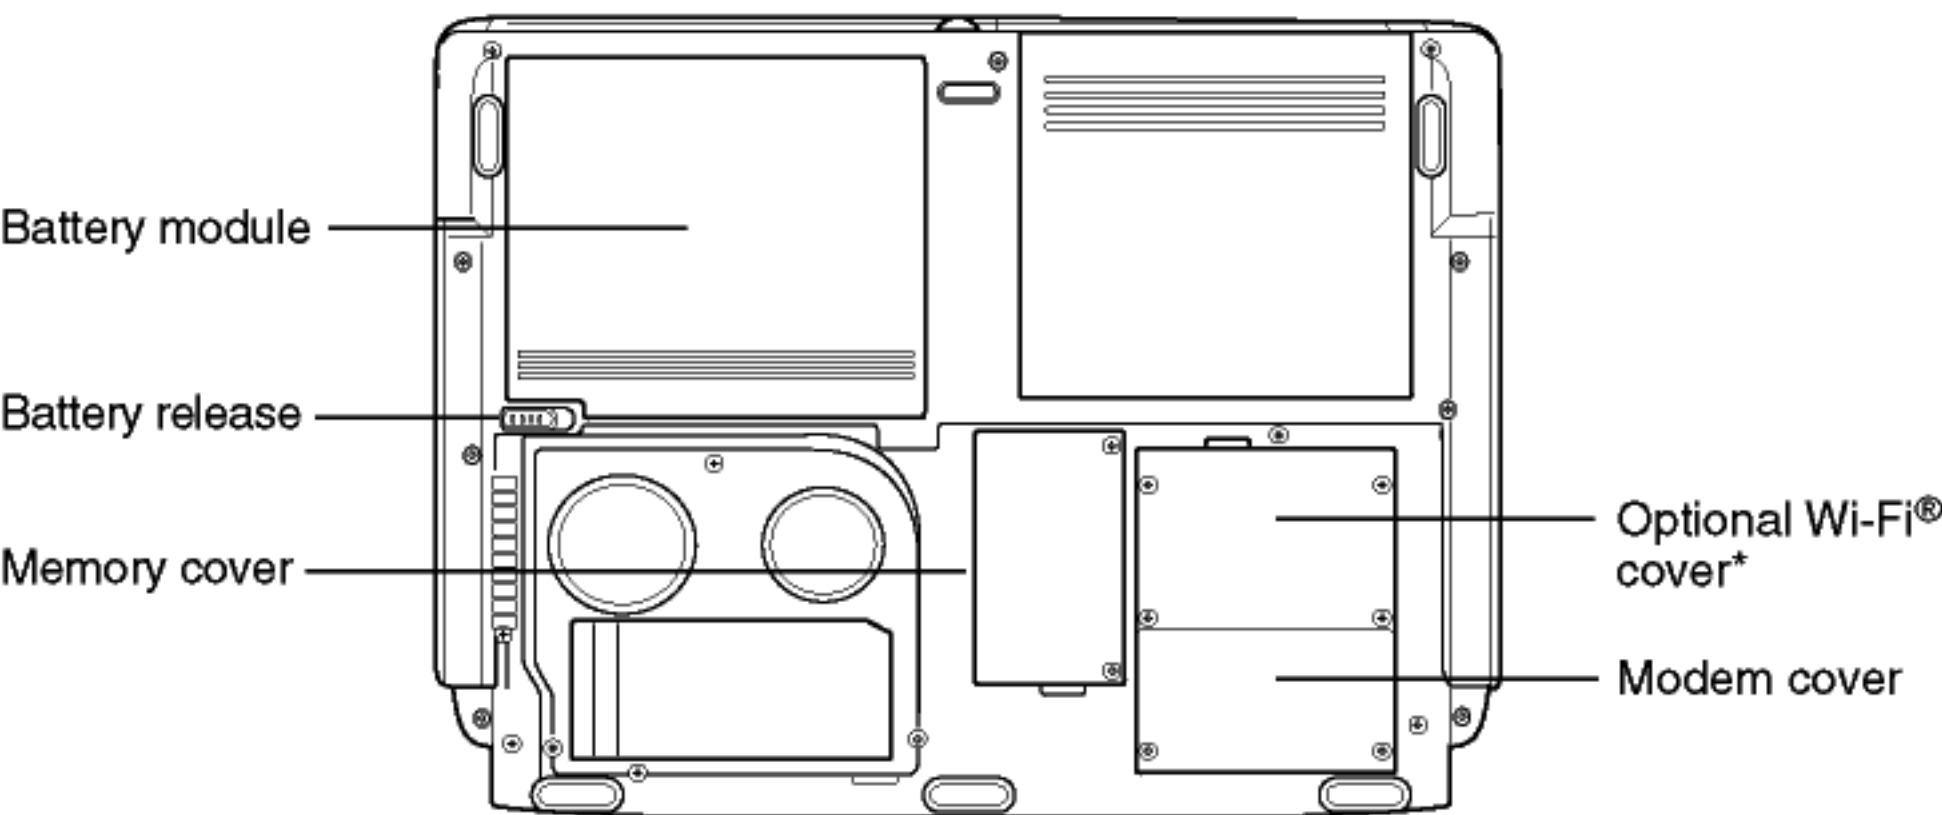

*Functional only on systems with wireless module installed.